



# Straight Grab Rail

## Model RBA4000-Series



### Materials & Features

Stainless steel straight grab rails available in a range of lengths meet the requirements of AS1428.1-2009. The snap flange cover conceals the fixings.

### Technical Detail

Rail: 32mm [Dia], 304 Satin Stainless Steel  
Fixings: By others

### Available Models


- RBA4000-030** Straight Grab Rail 300mm
- RBA4000-045** Straight Grab Rail 450mm
- RBA4000-060** Straight Grab Rail 600mm
- RBA4000-075** Straight Grab Rail 750mm
- RBA4000-080** Straight Grab Rail 800mm
- RBA4000-090** Straight Grab Rail 900mm
- RBA4000-100** Straight Grab Rail 1000mm
- RBA4000-120** Straight Grab Rail 1200mm

\*Additional sizes available upon request


### Installation

Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended. Refer local codes and Installation Instructions for location of fixing points, method of attachment, etc.


**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

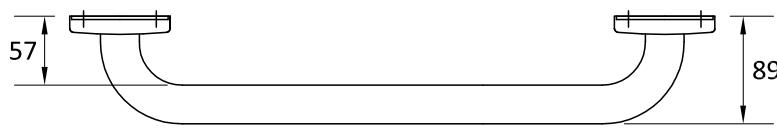

Plan

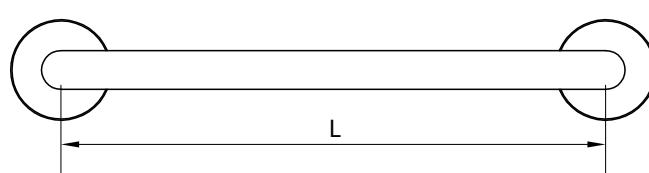

Elevation



Section



As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 07/17 © 2017 by RBA Group TD/Model RBA4000-Series/0717